DIGITUS® Professional

PoE Injector, 802.3at

DN-95103-1
4016032283676

Integrates Power over Ethernet technology to legacy network devices

- Complies with the 802.3at PoE+ and the 802.3af PoE standard
- 48V output voltage, 27 Watt
- LAN(RJ45) input jack
- LAN(RJ45) output jack
- Connection: 10/100 Mbit/s
- Each output port has output current limited, short-circuit protection, complete Powered Device (PD) detection and classification
- Operating system independent, supports e.g. Windows, Linux, Mac-OS and Sun

DIGITUS
Professional
• Compatible with 802.3at/
at standard
• 48V output voltage, 27 Watt
• LAN(RJ45) input jack
• PoE(RJ45) output jack
• Ethernet Connection:
10/100 Mbit/s
• Features output current limitation,
short-circuit protection,
Powered Device (PD) detection
and classification
PoE Power Injector
IEEE 802.3at
DATA
(IN)
POWER

DIGITUS
PoE Power Injector
IEEE 802.3at
DATA
(IN)

DIGITUS
PoE Power Injector
IEEE 802.3at
DATA
(IN)

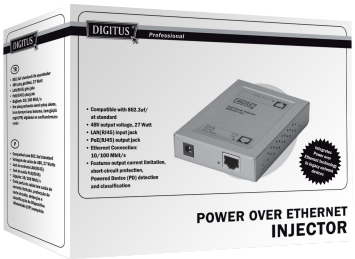
DIGITUS
Professional
• Compatible with 802.3at/
at standard
• 48V output voltage, 27 Watt
• LAN(RJ45) input jack
• PoE(RJ45) output jack
• Ethernet Connection:
10/100 Mbit/s
• Features output current limitation,
short-circuit protection,
Powered Device (PD) detection
and classification
POWER OVER ETHERNET
INJECTOR